



- PRODUCTS
- SUPPORT
- CONTACT
- EVENTS
- ABOUT ICT
- HOME

Bill Acceptor **▣** Coin Acceptor Mini Thermal Printer Card Dispenser Note Dispenser Hopper Counterfeit Detector Programmer
 :Currencies Accepted:: A / V Series E Series J Series K Series L Series LV Series N Series NK Series P Series S Series TAO Series
 FAQ Technical Service Manual Download Software Download

[About ICT Milestone Research & Development](#)



PRODUCT LIST

- Bill Acceptor**
 - Currencies Accepted
- Coin Acceptor
- Mini Thermal Printer
- Card Dispenser
- Note Dispenser
- Hopper
- Counterfeit Detector
- Programmer



Bill Acceptor

S7 [Power saving type]

Bill insertion	4 - way Acceptance
Acceptance speed	Approx. 3 seconds (including bill stacking)
Interface	Pulse or M.D.B
Bill box Capacity	100 bills (80-120) 200 bills (200-300) 400 bills (350-450) 800 bills (750-850)
Power Sources	12V DC (9V-15V)
Power consumption	Action mode : 12V , 2A (peak) , 650mA (average) Standby mode : 9V ~ 15V DC Power saving mode : 12V , Approx. 40µA
Environment range	Operating Temperature : -15°C ~ 50°C Storage Temperature : -30°C ~ 70°C Humidity : 30%-85% RH (no condensation)
Weight	Approx. 2kg (shipping)
Acceptance rate	96% or more The second acceptance is included in the acceptance count. The following bills are excluded. a. Incomplete bills such as extremely dirty, wetted, broken or wrinkled ones. b. Bills folded at a corner or side. c. Incorrect-made bills.
Features	1.Can operate on battery[12V 7Ah]. (Battery operation approximatly 5,000 bills). 2.Stand-by time approximatly 1-2 months. 3.Dew resistant.
Certificates	CE, TUV
Developed	Bahrain, Canada, Croatia, Czech, East Caribbean, Euro, Kuwait, Malaysia, New Zealand, Romania, Russia, Singapore, Ukraine, United Kingdom, United States.



- [Model Number Configuration](#)
- [Manual Download](#)

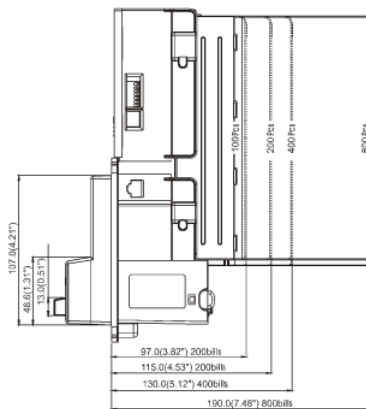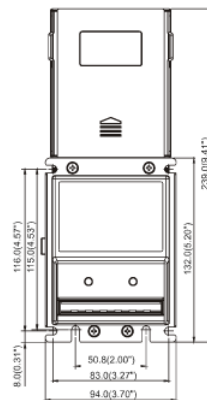

Unit : mm () : in